

MOTORIZED DIGITAL ROCKWELL/SUPERFICIAL ROCKWELL HARDNESS TESTERS

**POPULAR
MODEL**



FORCE LOADING BY ELECTRIC
MOTOR (WITHOUT WEIGHTS)

TOUCH
SCREEN



Ø58mm flat anvil
(included)





Ø150mm flat anvil
(included)



V-type anvil
(included)





printer
(included)

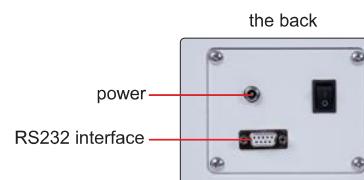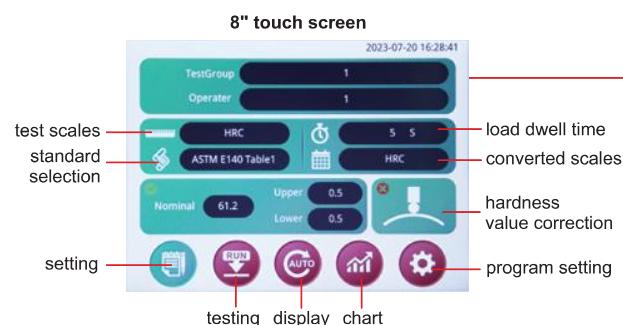

HDT-RT151

computer software (optional)

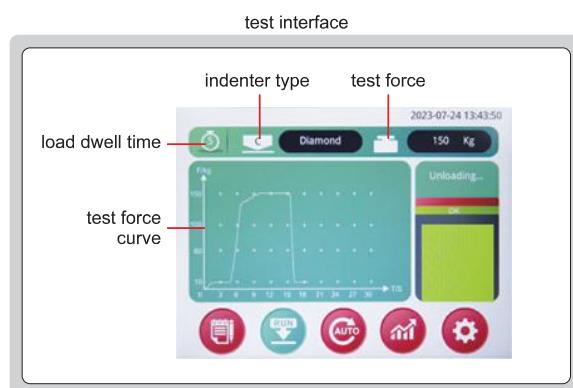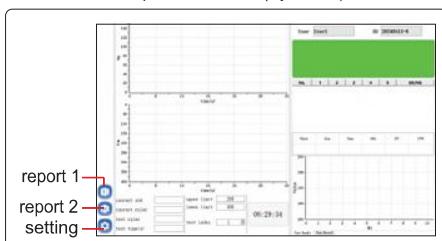

test result display interface


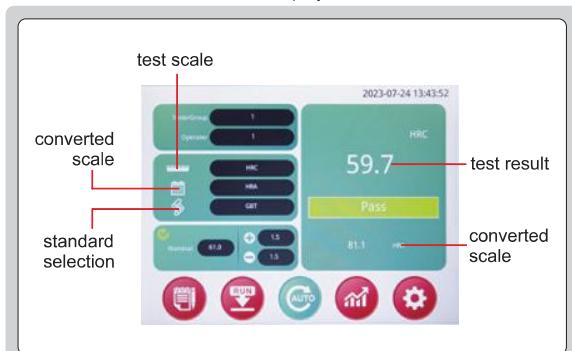


chart interface

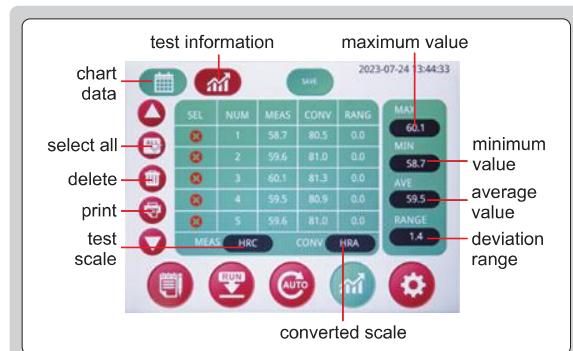

- Electronic loading test force, high accuracy of force value, and stable measurement value
- Touch screen operation and display, simple operation interface
- 15 types of Rockwell hardness scales can be tested
- Convertible to various hardness standards such as HB and HV
- 500 sets of storage
- With correction function, the hardness value can be corrected based on the size of the cylinders
- According to ISO 6508

SPECIFICATION

Code	HDT-RT151	HDT-RT152	HDT-RT153
Type	Rockwell	Superficial Rockwell	Rockwell and Superficial Rockwell
Measurement range	20~88HRA, 20~100HRB, 20~70HRC	70~91HR15N, 42~80HR30N, 42~70HR45N, 73~93HR15T, 43~82HR30T, 12~72HR45T	Rockwell: 20~88HRA, 20~100HRB, 20~70HRC; Superficial RockWell: 70~91HR15N, 42~80HR30N, 42~70HR45N, 73~93HR15T, 43~82HR30T, 12~72HR45T
Hardness scale	with indenter included	HRA, HRB, HRC, HRD, HRF, HRG	HR15N, HR30N, HR45N, HR15T, HR30T, HR45T
	with optional indenter	HRE, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV	HR15W, HR30W, HR45W, HR15X, HR30X, HR45X, HR15Y, HR30Y, HR45Y
Preliminary test force	98N/10kgf for Rockwell	29.4N/3kgf for Superficial Rockwell	98N/10kgf for Rockwell 29.4N/3kgf for Superficial Rockwell
Test force	588N (60kg), 980N (100kg), 1471N (150kg)	147N (15kg), 294N (30kg), 441N (45kg)	147N (15kg), 294N (30kg), 441N (45kg), 588N (60kg), 980N (100kg), 1471N (150kg)
Stage elevation	manual		
Load control	automatic (load/dwell/unload)		
Load dwell time	2~60 second		
Resolution	0.1HR		
Max. workpiece height	230mm		
Max. testing width	170mm		
Power supply	100~240V, 50/60Hz		
Dimension	475×200×700mm		
Weight	70kg		

STANDARD DELIVERY

Code	HDT-RT151	HDT-RT152	HDT-RT153
Main unit	1 pc	1 pc	1 pc
Diamond indenter	1 pc	1 pc	1 pc
Ø1.5875mm carbide ball indenter	1 pc	1 pc	1 pc
Ø58mm flat anvil	1 pc	1 pc	1 pc
Ø150mm flat anvil	1 pc	1 pc	1 pc
V-type anvil	1 pc	1 pc	1 pc
Hardness test block HRC20~30	1 pc	—	1 pc
Hardness test block HRC40~50	1 pc	—	—
Hardness test block HRC60~70	1 pc	—	1 pc
Hardness test block HRBW80~100	1 pc	—	1 pc
Hardness test block HRA80~90	1 pc	—	—
Hardness test block HR15N80~90	—	1 pc	—
Hardness test block HR30N60~85	—	1 pc	1 pc
Hardness test block HR30TW70~85	—	1 pc	1 pc
Printer	1 pc	1 pc	1 pc
Anti-dust cover	1 pc	1 pc	1 pc

OPTIONAL ACCESSORY

Hardness test block HRC20~30	HDT-B-HRC1	Hardness test block HR30N55~73	HDT-B-HR30N2
Hardness test block HRC35~55	HDT-B-HRC2	Hardness test block HR30T73~82	HDT-B-HR30T
Hardness test block HRC60~70	HDT-B-HRC3	Software	HDT-RT15-RECEIVER
Hardness test block HRB88~100	HDT-B-HRB	Ø12.7mm carbide ball indenter	HDT-RT15-INDENTER1
Hardness test block HRA80~84	HDT-B-HRA	Ø6.35mm carbide ball indenter	HDT-RT15-INDENTER2
Hardness test block HR15N78~88	HDT-B-HR15N2	Ø3.175mm carbide ball indenter	HDT-RT15-INDENTER3